



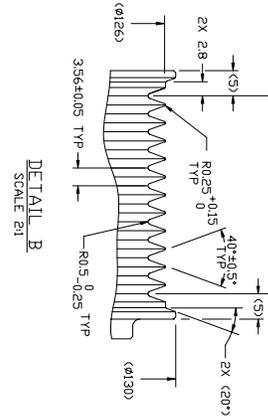





REV	DATE	BY	CHK	DESCRIPTION
1				INITIAL ISSUE
2				REVISED
3				REVISED
4				REVISED
5				REVISED
6				REVISED
7				REVISED
8				REVISED
9				REVISED
10				REVISED
11				REVISED
12				REVISED
13				REVISED
14				REVISED
15				REVISED
16				REVISED



CONNECTOR PAKKARD # 1530002
SEAL: S # 12015284
PACKKARD # 1530004
SECONDARY LOCK # 1530014
AVX 1.25 BLACK
AVX 1.25 RED

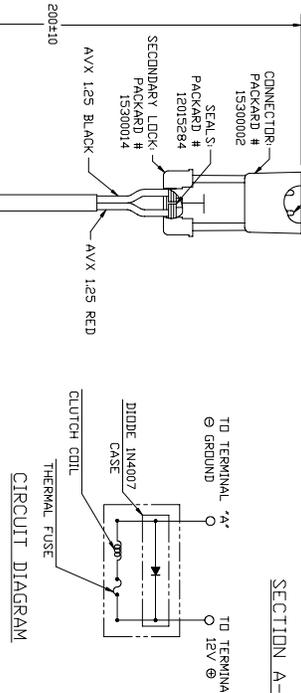

SECTION C-C
SCALE 2:1
TYPICAL BOTH PORTS
(SECTION SHOWN WITH SEAL CAP REMOVED)

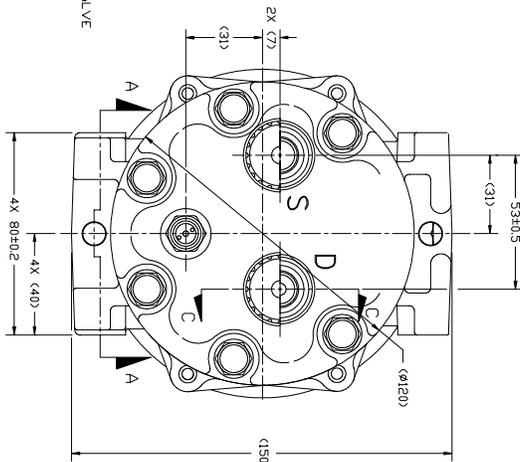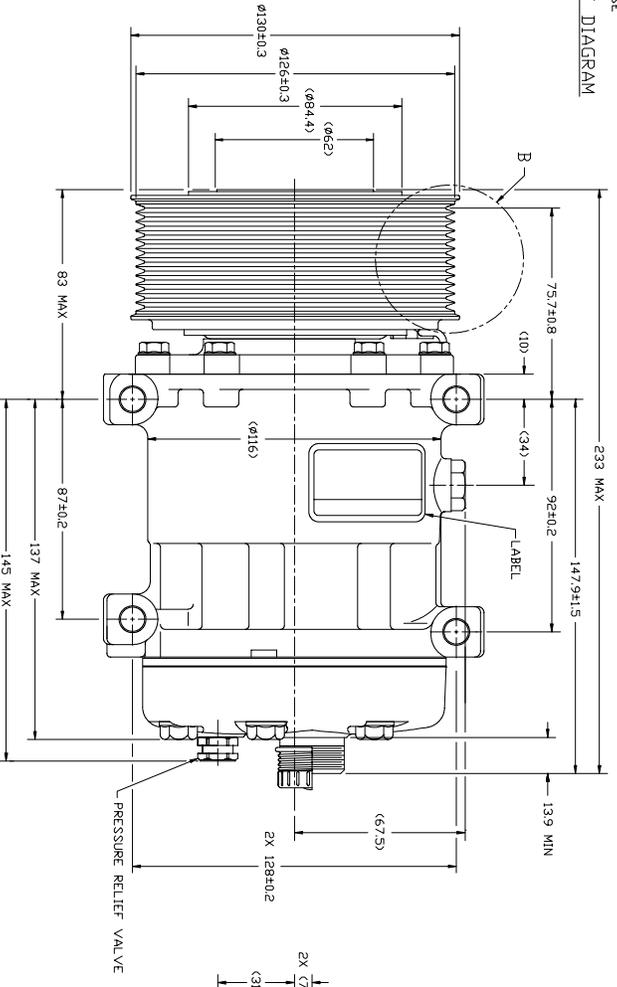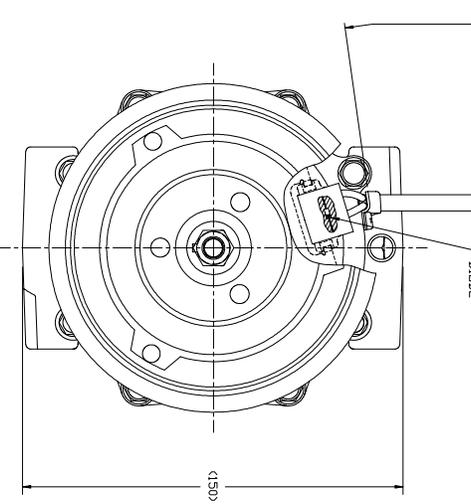

COMPRESSOR SPECIFICATIONS (REF)

DISPLACEMENT PER REVOLUTION	154.9 cc / rev. (9.5 cu.in. / rev.)
MAXIMUM ALLOWABLE RPM	8000 R.P.M.
MAXIMUM ALLOWABLE CONTINUOUS RPM	6000 R.P.M.
REFRIGERANT	R134a
OIL (SP-15)	300 cc (10.1 floz.)
WEIGHT	81 kgf (179 lb.)
PRV OPENING PRESSURE RANGE	508 - 595 PSIG

CLUTCH SPECIFICATIONS (REF)

RATED VOLTAGE	DC 12V
BREKKAWAY TORQUE	3.5 kgf·m min. @ 12V
MINIMUM ENGAGEMENT VOLTAGE	7.5V @ AIR GAP 0.6mm
POWER CONSUMPTION	42 watts max.
BELT TYPE	PV12
MAXIMUM ALLOWABLE BELT TENSION	120 kgf
PULLEY DIAMETER	Ø126 mm (4.96 in.)
CLUTCH TYPE	HEAVY DUTY

SANDEN
SANDEN INTERNATIONAL, U.S.A., INC.
14100 E. SPRING CREEK RD., DENVER, CO 80231, U.S.A.
TELEPHONE: (303) 751-1200
FAX: (303) 751-1201
E-MAIL: SANDEN@SANDEN.COM

DD
NDT
SCALE
A

COMPRESSOR
4088-6000